

PISTON TYPE MECHANICAL DIFFERENTIAL PRESSURE GAUGE

PRESSURE GAUGES

REOTEMP Series D20 Piston Type Mechanical Differential Pressure Gauges are primarily designed for liquid applications. Differential pressure is sensed by the movement of a precisely ground floating piston/magnet in a precision bore against a calibrated spring. A rotary pointer magnet located close to the internal magnet follows the movement of the piston magnet and indicates differential pressure on the dial. Piston type differential pressure gauges exhibit a slight amount of bypass as the fluid crosses from the high to the low pressure port.



D20




Fillable

FEATURES / BENEFITS


- Rugged, Compact, Cost Effective Design
- Weatherproof Rated to NEMA 4X/IP65
- Working Pressure Up to 6,000 psi
- Over-range Protection to Max Working Pressure
- Popular for Filters and Strainers
- $\pm 2\%$ Full Scale Accuracy

SPECIFICATIONS


Accuracy	$\pm 2\%$ Full Scale
Ambient Limits	-40°F/130°F
Process Limits	-40°F/200°F
Process Limits with Diaphragm Seal	Series D20 cannot be mounted to a diaphragm seal. See series D40/42 for gauges mountable to a diaphragm seal.
Wetted Materials	Body: Aluminum, 316SS Internal Parts: 316SS Gasket/Seals: Buna, Viton, Teflon, Ethylene Propylene, or Perfluoroelastomer
Lens	Plastic (Standard) or Laminated Safety Glass
Other Materials	Case: Aluminum or Engineered Plastic Dial: White Aluminum, Black Letters
Fillable	Yes, Except for 3.5" Dial
Maximum Working Pressure	3,000 psi - Aluminum Body 6,000 psi - 316SS Body
Environmental Protection	NEMA 4X/IP65

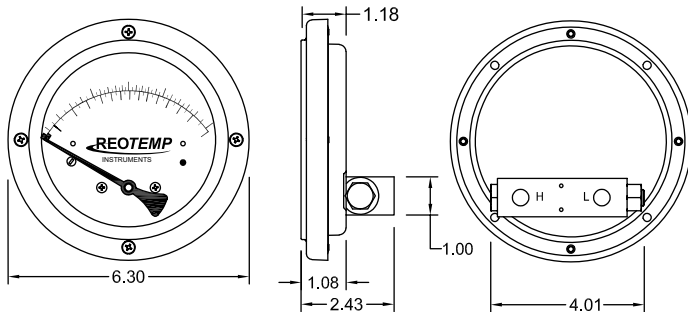

D20 4.5" Dial



D20 3.5" Dial



D20 2.5" Dial

PISTON TYPE MECHANICAL DIFFERENTIAL PRESSURE GAUGE



Visit reotemp.com

- ✓ Configure Part #
- ✓ Generate a Custom Engineering Drawing
- ✓ Get Price
- ✓ Download PDF Data Sheets

HOW TO ORDER: Choose options to build a part number. For example: **D202PAB-B4XXA-PD5-M1**

D20	2P	A	B	-B4	XX	A
SERIES	DIAL SIZE/ CASE MATERIAL	BODY/ INTERNALS	DIAPHRAGM & GASKETS	PROCESS CONNECTION	SWITCH OR TRANSMITTER TYPE & HOUSING	ELECTRICAL SPECIFICATION
D20 = Mechanical DP Gauge Piston Style (5-110 psid)	2P = 2.5" Dial, Plastic Case 4P = 4.5" Dial, Plastic Case 3A = 3.5" Dial Aluminum Case 4A = 4.5" Dial, Aluminum Case	A = Aluminum/ 316SS S = 316SS/ 316SS Wetted	B = Buna-N V = Viton E = Ethylene Propylene P = Perfluoro-elastomer Wetted	-B4 = 1/4" NPTF back -E4 = 1/4" NPTF end connection -L4 = 1/4" NPTF bottom -E2 = 1/2" NPTF end adapters	XX = None A3 = Single Reed Switch, Flying Leads with Grommet Wire Seal A4 = Dual Reed Switch, Flying Leads with Grommet Wire Seal A5 = Single Reed Switch, Flying Leads with 1/4" FNPT NEMA4X A6 = Dual Reed Switch, Flying Leads with 1/4" FNPT NEMA4X D3 = Single Reed Switch, Explosion Proof Enclosure* D4 = Dual Reed Switch, Explosion Proof Enclosure*	X = None A = SPDT, 3W, .25Amp 125VAC/Vdc B = SPST, 60W, 1.0Amp 240VAC/Vdc

*Complete assembly rated class 1, Div. 2, groups A, B, C, D; Class II, Div. 2, Groups F&G

PRESSURE GAUGES

-PD5

-M1

PRESSURE RANGE

OPTIONS

- PD5 = 0-5 psid
- PD10 = 0-10 psid
- PD20 = 0-20 psid
- PD50 = 0-50 psid
- PD100 = 0-100 psid

For Additional Range Codes See Page 46

- M1 = 2" Pipe Mounting Kit with Carbon Steel Bracket
- M2 = 2" Pipe Mounting Kit with Stainless Steel Bracket
- M3 = Wall Mounting Kit
- SG = Laminated Safety Glass (ONLY with 4A Dial)
- MP = Max Pointer (Not Available with SG or LF)
- LF = Liquid fill (Not Available with 3A Dial)
- TS = SS Tag
- OX = Cleaned for oxygen service